



Vehicles at Work



INDEX

ALL TERRAIN VEHICLES

• MTA 250 4x2 Transporter	3
• MTA 500 4x4 Transporter	4
• BUFFALO 10 All Terrain Vehicle	5/6
• SPEEDY YE – R2E – R2E Plus All Terrain Vehicle	7/8
• MASTER N All Terrain Vehicle	9/10
• MASTER SY All Terrain Vehicle	11/12
• SLALOM 30 SY All Terrain Vehicle	13/14

TREE FRUIT HARVESTERS

• COMPACT MAGA Vibrating Head With Extending Arm	15/16
--	-------

PTO DRIVEN TRAILERS

• RTS 120 PTO driven trailers for Motocultivators	17/18
• RTN 500 PTO driven trailers for Motohoes	19/20
• RN 6 Trailers for Motocultivators and Motorhoes	21
• RP 16 – 20 – 25 – 30 M PTO driven Trailers for Tractors – Heavy duty range	22/23

DRAGGING TRAILERS

• RN 10 – 15 – 25 – 30 Trailers for Tractors – With brakes	24/25
• RP 16 – 20 – 25 – 30 T Trailers for Tractors – Heavy duty range	26/27

Transporter

MTA 250 4x2

TECHNICAL SPECIFICATIONS

ENGINE	Diesel air cooled manual rope starter, tropicalized
CLUTCH	Dry single plate with safety device on handlebars
GEAR BOX	4 speeds 3FW + 1RV
TRACTION	4x2 wheels , rear driving axle
WHEELS	175/70 x 13 Road profile – no spare wheel
TRANSMISSION	Heavy duty: Front fixed axle, central reduction unit, rear driving axle
STEERING	Handle driving, adjustable in height
BRAKES	Mechanical drum brakes on rear wheels with pedal control Parking brake system on brake pedal
FRAME	Made of tubular steel with central torsion max 30°
BODY	180x140x30 cm
SIDE BOARDS	All galvanised, hinged and detachable
TIPPING	Rear manual
DRIVING	Bench seat for central positioning drive
SPEED	20 Km/h approx
PLAYLOAD	700 kg
NET WEIGHT	500 Kg
MULTI-USES	4x2 Transporter
FUNCTION	PTO / Auxiliary drive for pulley/ water pump

CODE	DESCRIPTION	EURO
	MTA 250 Lombardini Hp 12.2	8.000,00
	<i>Option and accessories:</i>	
NBS	No Body and no Sides	-420,00
NB	No body	-180,00
NW	No wheels	-190,00
07.00029	Rear Manual Hydraulic tipping	575,00



Transporter

MTA 500 4x4

TECHNICAL SPECIFICATIONS

MOTORHOE

ENGINE	Diesel air cooled manual rope starter, tropicalized
CLUTCH	Dry single plate with safety device on handle bars
GEAR BOX	4 speeds 3FW + 1RV
ACCESSORIES	Rotary hoe units 8 elements with disc Pulley dependent on engine

TRAILER

BRAKES	Mechanical drum brakes on rear wheels with pedal control Parking brake system on brake pedal
FRAME BODY	Made of tubular steel with central torsion 30° 180x140x30 cm
SIDE BOARDS	All Galvanised, hinged and detachable
TIPPING	Rear manual

TRANSPORTER

TRANSMISSION	Heavy duty: Front semi differential hubs 4 positions, Central reduction unit; rear diff axle
STEERING	Handle driving adjustable in height
TRACTION	4x4 or 4x2 driving wheels
WHEELS	5.00 x 12 – no spare wheel
DRIVING	Bench seat for central positioning drive
SPEED	20 Km/h
PLAYLOAD	700 kg
PTO	Dependent on gear box
NET WEIGHT	500 Kg

TRIPLE FUNCTION	• Land cultivating • 4x4 Transporter • PTO / Auxiliary drive for pulley/ water pump
------------------------	---

CODE	DESCRIPTION	EURO
	MTA 500 (Tiller unit + PTO driven trailer RTN 500 series) Lombardini Hp 12.2	9.000,00
	<i>Option and accessories:</i>	
NBS	No Body and no Side boards	-420,00
NW	No wheels	-180,00
W65	Wheels 6.5/80x12 Agricultural Tread	162,00
SW	Steering wheel	350,00
07.00001	Load protection grill h=72	200,00
07.00029	Rear manual hydraulic tipping	600,00

All Terrain Vehicle

BUFFALO 10 YS - YE

TECHNICAL SPECIFICATIONS

ENGINE	Diesel – air cooled – Dry air filter Recoil rope starter – Water Trap
CLUTCH	Dry single plate with pedal control
GEAR BOX	Synchromesh 6 speeds with reduction unit 5FW + 1REV
TRACTION	4x4 driving wheels , front disengageable
WHEELS	7.00 x 12 - 6 p.r. – no spare wheel
STEERING	Rack and pinion with Self-aligning system
BRAKES	Dual Braking hydraulic system circuit: Front discs, rear drums Parking Hand Brake
CHASSIS	Steel fabricated frame. Central oscillation pivot $\pm 15^\circ$ Axles mounted on silent-block
BODY	Std chassis to fit different body options
PTO	Auxiliary with ground speeds only.
DRIVING	Single central adjustable seat
PAYLOAD	600 kg approx (600 kg. towing capacity)
SPEED	30 Km/h
NET WEIGHT	750 Kg
LITERATURE TOOLS	Wheel spanner, front rescue hook, operator's manual



BUFFALO 10 YE
Std specs
29x12.50x15 Flotation Tyres
PTO on/off device + shaft
06.00085
EURO 11.900,00

CODE	DESCRIPTION	EURO
61/0101	BUFFALO 10 YS Yanmar LN100 Diesel KW 8,3 - Cv 11.3 (1 cylinder) Recoil rope starter – 5+1 speeds – Water trap Without Body – without Hydraulic Tipping	9.950,00
Options and accessories:		
<i>Engine options</i>		
ESB	Electric Starter and hour meter (YE version)	500,00
ESBL	Electric Starter, hour meter, Front Lights	580,00
<i>Body options</i>		
FB	Flat body 1550x1250 mm with sides (Fixed)	980,00
FBTB	Flat body 1550x1250 mm with sides and Hydraulic tipping	1.550,00
DUMP-M	Dump Body and Manual tipping*	1.500,00
DUMP-H	Dump Body and Hydraulic tipping*	1.700,00
CKD-M	Kit CKD Dump Body and Manual tipping*	1.100,00
CKD-H	Kit CKD Dump Body and Hydraulic tipping*	1.300,00
S	SPRAYER Application**	POR
FS	FERTILISER SPREADER Application**	POR
<i>Wheel options</i>		
WB750	Set of wheels 7.50x16	300,00
WB29	Set of flotation wheels 29/12.50x15 4pr Agr. Tread	1.150,00
<i>Transfer Options</i>		
M2.6	Reduction Unit (10 FW + 2 REV speeds)	95,00
RS	Creeper speed kit ***	150,00
<i>PTO options</i>		
PTO	PTO on/off lever mechanism**	150,00
06.00085	Rear PTO shaft extension (Shaft + female coupler 1"3/8)	150,00
07.00019	Kit Rear PTO shaft extension (Shaft + male outputshaft 1"3/8)	260,00
<i>Other options</i>		
17.00151	Driving Mirror (Left or Right)	50,00
Example	Standard "IN FIELD" Vehicle for Palm Oil Plantation FFB COLLECTION	
61/0102	BUFFALO 10 YE Yanmar LN100 Diesel KW 8,3 - Cv 11.3 (1 cylinder) Electric Starter – Water Trap – 5 FW + 1 REV Speeds Flotation Wheels 29-12.50x15 4 pr Dump Body 1.15 pivot high – Hydraulic Tipping	12.900,00

* Body dimensions: 1580x1230 mm – 600lt capacity with pivot height available at 0.66 mt or 1.15 mt. Please specify.

** cod. PTO recommended and cod 06.00085 compulsory

*** Available both on single range and double range reduction unit.



SPRAYER



FLAT DECK



SPREADER



DUMP BODY

SPEEDY YE - R2E - R2E Plus

TECHNICAL SPECIFICATIONS

ENGINE	1 cylinder / 2 cylinders Diesel (11.3 - 16.5 – 19 Cv) Air cooled
CLUTCH	Dry single plate with pedal control
GEAR BOX	Syncromesh 12 speeds with reduction unit: 5FW + 1RV low and 5FW + 1RV high
TRACTION	4x4 driving wheels , front disengagable
WHEELS	6.5/80 x 12 - 4 p.r. - Tractor – no spare wheel
STEERING	Rack and pinion with Self-aligning system
BRAKES	Dual Braking hydraulic system circuit: Front discs, rear drums Parking Hand Brake
FRAME	Made of tubular steel mounted on silent-block Central oscillation pivot $\pm 15^\circ$
BODY	1800x1400x300 mm
SIDE BOARDS	All galvanised, hinged and detachable
PTO	Auxiliary with ground speed
TIPPING	Rear Manual
ELECTRIC SYSTEM	12 Volts: electric starting-up, parking lights, sidelights, stop, high and low beams, horn, hazard, warning control devices and lights, battery 55 AH
DRIVING	Single central adjustable seat and driving mirror
PAYLOAD	670 kg approx (towing of 500 kg)
SPEED	40 Km/h
NET WEIGHT	580 Kg.
SAFETY	Safety start on clutch pedal
LITTERATURE TOOLS	Wheel spanner, Operator's manual, Front rescue hook



CODE	DESCRIPTION	EURO
60/0030	SPEEDY YE Yanmar L100 AE-DEI Diesel KW 8,3 - Cv 11.3 (1 cylinder) Body 1800x 1400 x300 mm	10.200,00
60/0060	SPEEDY R2E Ruggerini MD 151 Diesel KW 12 – Cv 16,5 (2 cylinders) Body 1800x 1400 x300 mm	11.400,00
60/0010	SPEEDY R2E Plus Ruggerini MD 191 Diesel KW 14 – Cv 19 (2 cylinders) Body 1800x 1400 x300 mm	11.600,00
Options and accessories:		
B1000	Body 1600x1000x300 mm (Max width 1070mm) *	560,00
B1200	Body 1800x1200x300 mm	100,00
B1400	Body 2000x1400x300 mm	150,00
07.00013	Kit side extensions 1800x 1200 x300 mm	400,00
07.00014	Kit side extensions 1800x 1400 x300 mm	420,00
07.00017	Kit side extensions 2000x 1400 x300 mm	450,00
NBSS	NO Body and NO Side boards	-600,00
NSS	NO Side boards	-300,00
07.00001-2	Load protection grill H=720mm	200,00
07.00003-25	Load protection grill H=960mm	220,00
07.00009	Rear manual hydraulic tipping	550,00
SVYE	Rear hydraulic with spool valve (only fitted on model YE)*	1.200,00
07.00010	Rear electro-hydraulic tipping	1.400,00
3WAY	3 WAY electro-hydraulic tipping *	1.900,00
07.00019	Rear PTO shaft extension	220,00
PTO	Rear PTO shaft extension with on/off lever mechanism	600,00
WS700	Wheels 7.00x12 - 6 p.r. – Agricultural Tread	320,00
WS23	Wheels 23x8.50x12 - 6 p.r. – Agricultural Tread or Turf	120,00
NWS	NO Wheels 6.5/80x12 TM	-350,00
GT500	Suspension seat	350,00
LC90	Bench seat *	250,00
14.00091	Safety Belt	60,00
07.00007	1/2 Folding Rops bar *	300,00
07.00006	1/2 CAB with roof, windscreen and wiper screen	1.400,00
17.00151	Extra driving mirror	60,00
07.00024	Rear tow hook	130,00
14.00035	Hour meter *	100,00
14.00144	Warning beeper for reverse (available only on R2E version)*	90,00
NLSS	NO Lighting system	-300,00
UKST	Heavy Duty Transmission	300,00

* Only factory fitted accessories.

All Terrain Vehicle

MASTER N

TECHNICAL SPECIFICATIONS

ENGINE	2 cylinders Diesel , air cooled
CLUTCH	Dry single plate with pedal control
GEAR BOX	Syncromesh with reduction unit: 10 speeds 4FW + 1RV low and 4FW + 1RV high
TRACTION	4x4 driving wheels, front disengageable
WHEELS	165 R 13 Agricultural Tread with spare wheel
SUSPENSIONS	Front: Independent coil spring with dampers; Rear: Parabolic leaf-springs with rubber shock absorbers
STEERING	Mechanical with rack and pinion
BRAKES	Dual braking hydraulic system circuit: Front discs, rear drums Parking Hand Brake
FRAME	Made of tubular steel with central oscillation pivot $\pm 15^\circ$
BODY	2000x1400x300 mm
SIDE BOARDS	All galvanised, hinged and detachable
TIPPING	Rear Manual
ELECTRIC SYSTEM	EEC Electric System including: Starting, parking lights, sidelights, stop, high and low beams, horn, hazard, warning lights, hour-meter, battery 55 AH
DRIVING	Single central adjustable seat
PAYLOAD	Kg 900 (towing of 900 kg.)
NET WEIGHT	900 Kg.
SPEED	40 Km/h
LITTERATURE TOOLS	Wheel spanner, Operator manual, Front rescue hook



CODE	DESCRIPTION	EURO
93/0002	MASTER N Ruggerini MD 151 KW 9.5 – CV 16.5 – 2 cylinders	13.500,00
Options and accessories:		
NBSM	NO Body and Side Boards	-700,00
NSM	NO Side Boards	-320,00
KSD	Kit side extensions	450,00
07.00001	Load protection grill H=720 mm	200,00
07.00003	Load protection grill H=960 mm	220,00
07.00011	Rear Manual Hydraulic Tipping	450,00
07.00012	Rear Electro-hydraulic Tipping	1.450,00
07.00020	Rear GS PTO shaft extension (version N)	220,00
W700	Wheels 7.00x12 - 6 p.r. Agric. Tread (+ spare wheel)	480,00
W23	Wheels 23x10.50x12 - 6 p.r. Agric. Tread or Turf (+ spare wheel)	250,00
LC100	Bench seat *	200,00
SC70	Deluxe adjustable seat and safety belt	250,00
14.00091	Safety belt	60,00
17.00151	Driving Mirror	60,00
ROPS	OCSE Rops safety frame only with central seat	250,00
07.00008	Cab complete with metal doors	3.500,00
07.00024	Rear Tow hook (Kg. 900)	130,00
14.00144	Warning beeper for reverse	90,00
UKT	Heavy-duty transmission	350,00

* Only factory fitted accessories.

MASTER SY

TECHNICAL SPECIFICATIONS

ENGINE	3 cylinder Diesel , liquid cooled
CLUTCH	Dry single plate with pedal control
GEAR BOX	Synchromesh 12 speeds with reduction unit: 5FW + 1RV low and 5FW + 1RV high
TRACTION	4x4 driving wheels, front disengageable
WHEELS	7.00 x 12 Agr. Tread with spare wheel
SUSPENSIONS	Front: Independent coil spring with gas-dampers; Rear: Parabolic leaf-springs with rubber shock absorbers
BRAKES	Dual Braking hydraulic system circuit: Front discs, rear drums Parking Hand Brake
FRAME	High quality box-section steel with central oscillation pivot $\pm 15^\circ$
SIDE BOARDS	All galvanised, hinged and detachable
TIPPING	3 WAY hydraulic system with spool valve control
ELECTRIC SYSTEM	EEC Electric System including: Starting, parking lights, sidelights, stop, high and low beams, horn, hazard, warning lights, water temperature gauge, hour-meter, battery 55 AH
DRIVING	Central position on Bench seat
PAYLOAD	Version Master 20 SY: 900 Kg (towing 1.000 Kg.) Version Master 30 SY: 1.200 Kg (towing 1.400 Kg.)
NET WEIGHT	1.000 Kg.
SPEED	35 Km/h
LITTERATURE TOOLS	Wheel Spanner, Front rescue hook, Operator's Manual



CODE	DESCRIPTION	EURO
93/0009	MASTER 20 SY – 854cc – Euro 2 Yanmar 3TNV70 (KW 17.1 – CV 24) Body 2000x1450x300 mm Mechanical with rack and pinion	17.900,00
93/0010	MASTER 30 SY – 1115cc – Euro 2 Yanmar 3TNV76 (KW 19.2 – Cv 26.5) Body 2100x1500x360 mm Twin rod hydrostatic steering with safety devices	18.900,00
	Options and accessories:	
KSE	Kit side extensions	470,00
NBSM	NO Body and NO Side boards	-800,00
NSM	NO Side Boards	-320,00
NTM	NO body, NO Side Boards and NO 3-WAY tipping	-1.200,00
07.00004-5	Load protection grill H=960 mm	250,00
07.00022+21	Rear GS PTO shaft extension (kit 1 speed)	800,00
07.00023+21	Rear GS PTO shaft extension (kit 2 speeds)	900,00
WM29	Wheels 29/12.50x15 4pr Agricultural Tread	1.800,00
WM10T	Wheels 10.0/80x12 4pr Multipurpose Tread	500,00
SC70	Deluxe adjustable seat and safety belt	-50,00
14.00091	Safety belt	60,00
22.00198	OCSE Ropes safety frame only with central seat	250,00
07.00008	Cab complete with metal doors	3.500,00
22.00197	Rear Tow hook	130,00
14.00144	Warning beeper for reverse	90,00
17.00151	Driving Mirror	60,00
14.00093	Temperature gauge	60,00
22.00670	Dump Body 1985x1425 mm 1500lt capacity Rear hydraulic tipping – Tipping Height 1560 mm (Available only for version MA30SY)	1.800,00



* Only factory fitted accessories.

Export Price list n.

All Terrain Vehicle

SLALOM 30 SY

TECHNICAL SPECIFICATIONS

ENGINE	3 cylinders Diesel 26.5 Hp, liquid cooled
CLUTCH	Dry single plate with pedal control
GEAR BOX	Synchromesh 12 speeds with reduction unit: 5 FW + 1 RV low and 5 FW + 1 RV high
TRACTION	4x4 driving wheels , front disengageable
WHEELS	185 R 14 C ric. Multipurpose Tread
SOUPENSIONS	Front: Independent coil spring with gas-dampers; Rear: Parabolic leaf-springs with rubber shock absorbers
STEERING	<i>Twin rod hydrostatic steering with safety device</i> Dual Braking hydraulic system circuit:
BRAKES	Front discs, rear drums Parking Hand Brake
FRAME	High quality box section steel with central oscillation pivot $\pm 15^\circ$
CAB	OECD approved, twin adjustable seats
BODY	2100x1500x360 mm
SIDE BOARDS	All galvanised, hinged and detachable
TIPPING	3-WAY hydraulic system with spool valve control
ELECTRIC SYSTEM	EEC Electric System including: Starting, parking lights, sidelights, stop, high and low beams, horn, hazard, warning lights, water temperature gauge, hour-meter, battery 55 AH
DRIVING	Left or right hand driving position
PAYLOAD	1.500 Kg (towing 1.400 Kg.)
SPEED	40 Km/h
LITTERATURE TOOLS	Wheel spanner, Operator manual, Spare wheel, Jack

CODE	DESCRIPTION	EURO
53/0006	SLALOM 30 SY – 1115cc – Euro 2 Yanmar 3TNV76 (KW 19.2 – Hp 26.5) liquid cooled	25.500,00
	<i>Options and accessories:</i>	
HS	Heater	800,00
07.00018	Kit side extensions 2100x1500x360 mm	470,00
07.00055	Kit grill side extensions 2100x1500x680 mm	700,00
NSSL	NO Side boards	-320,00
NBSSL	NO Body and NO Side boards	-800,00
NTSL	NO Body, NO Side boards and NO 3-WAY tipping	-1.200,00
07.00004-5	Load protection grill	250,00
07.00022+21	Rear GS PTO shaft extension (kit 1 speed)	800,00
07.00023+21	Rear GS PTO shaft extension (kit 2 speeds)	900,00
14.00091	Safety Belt	120,00
22.00197	Rear tow hook	130,00
14.00144	Warning beeper for reverse	90,00
W27	Wheels 27/8.50x15 - 4 p.r. Multipurpose Tread	300,00
W10	Wheels 10.0/80x12 - 8 p.r. Agricultural Tread	600,00
W29	Wheels 29/12.50x15 - 4 p.r. Agric. Tread	1.900,00
EW	Electric windows	350,00
RWL	Rotating warning light	80,00



**ABSOLUTELY
NEW**



VIBRATING HEAD WITH EXTENDING ARM COMPACT MAGA

STANDARD SPECIFICATIONS

TECHNICAL DATA

MAIN ARM	2 arm Extend / Retract with support base/oil tank. Lateral rotation 80°
HYDRAULIC SYSTEM	Independent from the tractor, separate system for vibrating head with pump and reversible motor. High pressure pump for arm with safety valves for increasing working life
DISTRIBUTOR CONTROL BLOCK	6 control levers for arm services 2 control levers for control vibrations
CONTROL LEVERS	- Rotation of arm ($\pm 40^\circ$) - Lateral Raise/Lower arm cylinder - Raise/Lower upper arm cylinder - Raise/Lower head - Rotation of head ($\pm 31^\circ$) - Opening/closing of jaws (option variable pressure control device) - 2 way vibration control (clockwise and anticlockwise) with safety lock to prevent accidental actuation - Over boost control
VIBRATION SYSTEM	Twin eccentric masses, 2 speed, forward & reverse to give 2 different frequencies and 2 vibration amplitudes
HYDRAULIC PUMP	Quick attach system to PTO shaft 1 3/8" shaft with safety lock
OIL RESERVOIR CAPACITY	65 Litres, integrated into base of arm.
WEIGHT	600 kg - machine installed on tractor in working condition

TRACTOR SPECIFICATIONS

POWER	Minimum power required = 55 Hp at PTO, wheeled or tracked, fruit version or reversible drive type, for both rear and front installation
ATTACHMENT	Front or rear 3 point linkage - Cat 1 or 2 (A and B)
PTO	Standard 540 rpm

TECHNICAL FEATURES OF THE MACHINE WHEN INSTALLING VIBRATING HEAD TO AN EXCAVATOR


REQUIRED WORKING OIL PRESSURE	200 bar
OIL FLOW REQUIRED FOR VIBRATING HEAD	60 L/min at least
MINIMUM MASS OF MACHINE	At least 5 ton excavator size

N.B.: Excavator MUST be equipped with an auxiliary hydraulic service line (e.g. hydraulic rock breaker/hammer). Anyway before fitting any head to an excavator please consult ERREPPPI Technical Dept advising Brand name of selected excavator, model number, capacity, hydraulic pump specifications and flow rates. This is required to supply correct matching vibrating head.

NOT JUST FOR OLIVES

CODE	DESCRIPTION	EURO
46/0007	COMPACT MAGA* assembly with arms (without vibrating head), control block, hydraulic pumps and pipework. 3 rd point linkage cat. 1 or 2	12.600,00
46/0003	MAGA 500 VIBRATING HEAD complete with suspension system, Reversible hydraulic motor, suitable for installation on COMPACT MAGA extending arm or excavator arm. Triple rubber jaws.	6.400,00
46/0006	MAGA 600 VIBRATING HEAD complete with suspension system, Reversible hydraulic motor, suitable for installation on COMPACT MAGA extending arm or excavator arm, complete with twin rubber jaws and variable pressure control device	7.000,00
46/0008	FRUIT COLLECTOR with upsidedown UMBRELLA Opening Diameter 6,5 mt with extension side of 300 mm. Hydraulic controls with spool valve (6 sections) for tractor fitment. Suitable for front or rear 3 rd point linkage mounting	9.900,00
EXCAVATOR'S INSTALLATION		
46/0004-12	Installation of Vibrating Head* on Excavator arm with 3 controls: - Attachment arm with cylinder for head rotation - Group of Cetop valve (3 functions) double effect complete with hydraulic kit and wiring harness, 12 Volt 1 Joystick, 1 control lever 3 positions, 1 Master switch and 1 RED Safety control switch, on driving position	6.800,00
46/0005-13	Installation of Vibrating Head* on Excavator arm with 4 controls: - Attachment arm with cylinders for head rotation and head lateral articulation - Group of control valves (4 functions) double acting complete with hydraulic kit and wiring harness, 12 Volt 2 Joysticks, 1 control lever 3 positions, 1 Master switch and 1 RED Safety control switch, on driving position	8.800,00
ACCESSORIES		
Addition	Kit for variable pressure control ON/OFF system (VEI) on auxiliary line for excavator without electric auxiliary control	390,00
07.00059	Kit of oil variable pressure control device on jaws for code 46/0003	350,00
17.00771	Kit of extra soft cushions for code 46/0003	750,00
17.00773	Kit of extra soft cushions for code 46/0006	850,00

*Vibrating head not inclusive. See code 46/0003 for MAGA 500 and 46/0007 for MAGA 600

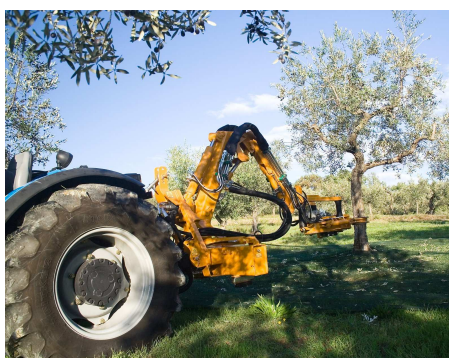

PTO DRIVEN TRAILERS for Motorcultivators

RTS 120

TECHNICAL SPECIFICATIONS

FRAME	Tubular steel structure
DUMP BODY	Steel sheet with winches
SIDE BOARDS	All hinged, removable and galvanised
CONNECTION	Special unit for each motorcultivator
TRACTION	PTO Driving wheels
DIFFERENTIAL	Reinforced automotive type
REDUCTION UNIT	Not present
TIPPING	Rear manual
BRAKING	Service: Mechanical with drums Parking: Mechanical with lever
SEAT	Central, soft
DRIVING	Central with <u>STEERING GROUP</u> Central with <u>HANDLE STEERING</u>
JACK	Adjustable in height
LOAD CAPACITY	700 Kg
EQUIPMENT	Double drive shaft, tool-box, oil
ACCESSORIES	Lighting, hydraulic braking, rear hydraulic tipping, kit Side extensions



SUITABLE MOTORCULTIVATORS:

I° • **ADRIATICA** Super Mec - Delta - CF 400 • **AGRIA** 2500 • **BCS** 725 - 735 - 749 - 760 • **BERTOLINI** 300 - 308 - 314 (6-7) - 315 - 316 - 317 - 318 - 408 • **CARRARO** Serie 43 - 500 - 700 • **FERRARI** 72 S - 91 - 92 - MC 50/60 • **MAB** Talpa 14Cv - TL 85 • **MECCANICA BENASSI** 419 - 421 • **NIBBI** 519 - 520 - 719 - FOX 600/700/800 - MAK 16/17/18 • **PASQUALI** Serie Media - 972 - YR 15,5 • **SEP** 2500 - 3000 - 5000 - 6000 • **VALPADANA** VMC 12-14 (5-7) - 140 - 160 - Blitz 80-120 - 150

II° • **BARBIERI** Leopard • **BCS** 737 - 745 - 755 • **BRUMI** 331 • **ERREPPi** MC 383 • **FORT** RS180 - 180S - Centauro • **GOLDONI** Special - Sp. Lux - Sp. 140 - 150 - 128 • **GRILLO** 127 - 129 - 131 • **LAMPACRESCIA** Castoro Super • **ROTECO** Duran (Mid 114)

III° • **ADRIATICA** Delta 18 Cv • **BARBIERI** 18 Cv • **FERRARI** 94 • **GOLDONI** Serie 700 • **PASQUALI** Serie Pesante • **RANDI** 3600 - 6000

IV° • **CASORZO** CM 91 • **PASQUALI** Serie XR 404 - 406 - 412 - XN 14.3 - 15.3 - 15.5 • **BENASSI** MC 450

CODE	DESCRIPTION	EURO
I° GROUP		
50/0200	Body 2000x1400x300 mm Trailer model RTS 120 V, STEERING GROUP	3.120,00
50/0201	Body 1800x1400x300 mm Trailer model RTS 120 S, HANDLE STEERING	2.770,00
II° GROUP		
50/0202	Body 2000x1400x300 mm Trailer model RTS 120 V, STEERING GROUP	2.900,00
50/0203	Body 1800x1400x300 mm Trailer model RTS 120 S, HANDLE STEERING	2.550,00
III° GROUP		
50/0204	Body 2000x1400x300 mm Trailer model RTS 120 V, STEERING GROUP Hydraulic braking system included	3.380,00
IV° GROUP		
50/0232	Body 1800x1400x300 mm Trailer model RTS 120 V, STEERING GROUP	3.120,00
50/0233	Trailer model RTS 120 S, HANDLE STEERING	2.770,00

N.B.: we can customise size of the loading platform (body and chassis):

Extra charge	Additional charge for different body size from standard	
	- length 1600-1800-2000 mm	
	- width 900-1200-1400 mm	350,00

N.B.: all trailers must be equipped with same size of wheels already assembled on the motocultivator. (see among accessories).

ACCESSORIES

37.00012.2	Wheels 6.5/80x12 4PR Agr. Tread (couple) for trailer	280,00
37.00111	Wheels 6.5/80x15 4PR Agr. Tread (couple) for trailer	350,00
07.00001	Load protection grill H=720mm	210,00
29.00228	Hydraulic braking system	260,00
07.00029	Rear manual hydraulic tipping	550,00
HS1814	High sides H=400 mm on 1800x1400	80,00
HS2014	High sides H=400 mm on 2000x1400	85,00
07.00014	Kit side extensions 1800x1400x300 mm	470,00
07.00017	Kit side extensions 2000x1400x300 mm	490,00
14.00017	Lighting system for trailer (2 pin plough) (battery not included)	230,00
14.00016	Lighting system for trailer (7 pin plough) (battery not included)	230,00

ATTENTION: before ordering trailer, analyse suitable types of motorcultivator and verify dimensions of tyre.

DRIVING WHEEL Trailers for Motorhoes

RTN 500

TECHNICAL SPECIFICATIONS

FRAME	Tubular steel structure
DUMP BODY	Steel sheet with winches
SIDE BOARDS	All Hinged, removable and galvanised
CONNECTION	Special unit for each type of suitable motorhoes
TRACTION	PTO Driving wheels
DIFFERENTIAL	Reinforced automotive type
REDUCTION UNIT	With release
TIPPING	Rear manual
BRAKING	Service: Mechanical with drums Parking: Mechanical with lever
SEAT	Central, soft
DRIVING	Central with <u>STEERING GROUP</u> Central with <u>HANDLE STEERING</u>
JACK	Adjustable in height
LOAD CAPACITY	700 Kg about
EQUIPMENT	Double drive shaft, tool-box, oil
ACCESSORIES	Lighting, hydraulic braking, rear hydraulic tipping, kit side extensions



CODE	DESCRIPTION	EURO
50/0300	Body 1600x1200x300 mm Trailer model RTN 500 V, STEERING GROUP,	2.950,00
50/0301	Trailer model RTN 500 S, HANDLE STEERING	2.750,00
50/0304	Body 1800x1400x300 mm Trailer model RTN 500 V, STEERING GROUP	3.000,00
50/0305	Trailer model RTN 500 S, HANDLE STEERING	2.800,00
50/0306	Body 2000x1400x300 mm Trailer model RTN 500 V, STEERING GROUP	3.050,00
N.B.: we can customise size of the loading platform (body and chassis):		
Extra charge	Additional charge for different body size from standard	
	- length 1600-1800-2000 mm	
	- width 900-1200-1400 mm	350,00

N.B.: all trailers must be equipped with same size of wheels both front (motorhoe) and rear (trailer).
(see accessories to find the suitable ones).

ACCESSORIES		
37.00019	Wheels 4.00x12 4PR Agr. Tread (couple) for MTH	190,00
37.00066	Wheels 4.00x12 4PR Agr. Tread (couple) for TRAILER	250,00
37.00109	Wheels 5.00x12 4PR Agr. Tread (couple) for MTH	200,00
37.00108	Wheels 5.00x12 4PR Agr. Tread (couple) for TRAILER	260,00
37.00077.2	Wheels 6.5/80x12 4PR Agr. Tread (couple) for MTH	280,00
37.00012.2	Wheels 6.5/80x12 4PR Agr. Tread (couple) for TRAILER	350,00
07.00001	Load protection grill H=720mm	210,00
29.00228	Hydraulic braking system	260,00
07.00029	Rear manual hydraulic tipping	550,00
HS1612	High sides H=400 mm on 1600x1200	75,00
HS1814	High sides H=400 mm on 1800x1400	80,00
HS2014	High sides H=400 mm on 2000x1400	85,00
07.00033	Kit side extensions 1600x1200x300 mm	450,00
07.00014	Kit side extensions 1800x1400x300 mm	470,00
07.00017	Kit side extensions 2000x1400x300 mm	490,00
14.00017	Lighing system for trailer (2 pin plough) (battery not included)	230,00
30.00940	Semi-differential hubs for motorhoe (pair)*	240,00
30.00106	Cage wheels Ø 48 x 16 cm. for motorhoe (pair)	180,00
30.00105	Tiller for coupling hubs or cage wheels	20,00

ATTENTION: before ordering trailer, analyse suitable types of motorcultivator and verify dimensions of tyre.

* **SEMI-DIFFERENTIAL HUBS AND CAGE WHEELS** are available with the follows **BUSHES**:

- Hexagonal mm 22, 27, 28, 30, 32, 35, 36
- DIN 5482 27x30 z16
- UNI 221 22x28 z6, 28x34 z6 e 32x38 z8

WHEEL TRAILER for Motorcultivators and Motorhoes

RN 6

CODE	DESCRIPTION	EURO
50/0400	Trailer model RN 6 – dragging wheels, load capacity Kg 600 , Body 1500x1100x300 mm, fixed made of tubular painted steel, end side openable, wheels 145/10 (or equivalent), rear manual tipping , Mechanical drum system with pedal control. Parking system without handle lever but with device of ratchet gear on pedal control. Tiller without connection flange	1.380,00
22.00718-D	Straight tiller – without flange (only tubular to weld) for motorhoe and motorcultivator without rotary hoe	50,00
22.00718	Curved tiller for Mtc – without flange (only tubular to weld) for motorcultivator with rotary hoe	60,00



HEAVY-DUTY RANGE of PTO DRIVEN TRAILER for Tractors and All Terrain Vehicles



RP M

TECHNICAL SPECIFICATIONS

FRAME	High quality fabricated steel chassis
BODY	Steel sheet 30/10 mm thickness, 2 winches and 8 hooks
SIDE BOARDS	All hinged and removable cpl with brackets for side extensions Removable posts, Rear side hinged at the top
TOW-HOOK	Adjustable in 6 positions
TRACTION	PTO DRIVING WHEELS
DIFFERENTIAL TRANSMISSION	Heavy duty Industrial type with U-joint with lubricable cross kit
REDUCTION UNIT	With NEUTRAL
TIPPING	3-WAY HYDRAULIC with quick attach coupler
BRAKING	With mechanical lever
LIGHTING	EEC standard system (7 pin plug)
WHEELS	10.0/75 x 15,3 Implement
WHEEL JACK	Adjustable in height
ACCESSORIES	Parabolic leaf-springs, side extensions, Agr. Tread tyre, Hydraulic braking

PTO drive shaft is not included.



CODE	DESCRIPTION	EURO
50/0416	Trailer model RP/16 M , load capacity Kg 1.600 Galvanised side boards Body 2400x1500x360 mm	6.230,00
50/0417	Trailer model RP/20 M , load capacity Kg 2.000 Galvanised side boards Body 2400x1500x360 mm	6.250,00
50/0418	Body 2600x1500x360 mm	6.350,00
50/0419	Trailer model RP/25 M , load capacity Kg 2.500 Galvanised side boards Body 2400x1500x360 mm	6.270,00
50/0420	Body 2600x1500x360 mm	6.370,00
50/0421	Body 2700x1600x360* mm – Parabolic leaf-springs	7.300,00
50/0423	Trailer model RP/30 M , load capacity Kg 3.000 Painted tubular side boards Body 2700x1600x360 mm	7.000,00
50/0422	Body 2700x1600x360* mm – Parabolic leaf-springs	7.400,00

* Galvanised sides not available



ATTENTION!!!

Tractors with anti-clockwise PTO need the special reduction unit with 3RD shaft.
CHECK BEFORE ORDERING

Options and applications:		
SRU	REDUCTION UNIT WITH 3 RD SHAFTS FOR APPLICATION ON TRACTORS WITH ANTI-CLOCKWISE PTO	560,00
WT	Wheels 10.0/75x15.3 Agr. Tread (only factory fitted)	310,00
07.00030	Hydraulic braking (only at origin)	350,00
****	Kit side extensions and other accessories	See page 17.

For other accessories, please contact our Tech Dept.

LIGHT WEIGHT RANGE OF WHEEL TRAILER for Tractors and All Terrain Vehicle



TECHNICAL SPECIFICATIONS



Trailer, EEC lighting system (7 pins), steel body with hinged and removable galvanised sides, **Parking hand brake**

Rear Manual Tipping

CODE	DESCRIPTION	EURO
	Trailer model RN/10 , load capacity Kg 1.000 , wheels 175/70-R13 (or equivalent),	
50/0402	Dump body 1800x1400x300 mm	1.600,00
50/0406	Dump body 2000x1400x300 mm	1.700,00

Rear mechanical Tipping

CODE	DESCRIPTION	EURO
	Trailer model RN/15 , load capacity Kg 1.500 , wheels 195/65 R 15 (or equivalent)	
50/0403	Body 2200x1500x360 mm	2.580,00
50/0407	Body 2400x1500x360 mm	2.680,00
	Trailer model RN/25 , load capacity Kg 2.500 , wheels 235/75 R15 (or equivalent),	
50/0404	Body 2500x1600x360 mm	2.860,00
	Trailer model RN/30 , load capacity Kg 3.000 , wheels 10.0/75-15.3 Implement	
50/0408	Body 2500x1600x360 mm	2.960,00

Rear Hydraulic Tipping with fast coupling

CODE	DESCRIPTION	EURO
	Trailer model RN/10 , load capacity Kg 1.000 , wheels 175/70 R 13 (or equivalent),	
50/0430	Body 2000x1400x300 mm	2.250,00
	Trailer model RN/15 , load capacity Kg 1.500 , wheels 195/65 R 15 (or equivalent)	
50/0432	Body 2400x1500x360 mm	3.350,00
	Trailer model RN/25 , load capacity Kg 2.500 , wheels 235/75 R 15 (or equivalent),	
50/0433	Body 2500x1600x360 mm	3.500,00
	Trailer model RN/30 , load capacity Kg 3.000 , wheels 10.0/75-15.3 Implement	
50/0434	Body 2500x1600x360 mm	3.600,00

LIGHT WEIGHT RANGE OF WHEEL TRAILER for Tractors and All Terrain Vehicle



<i>Options and accessories:</i>		
07.00014	Kit side extensions 1800x1400x300 mm	420,00
07.00017	Kit side extensions 2000x1400x300 mm	450,00
07.00015	Kit side extensions 2200x1500x360 mm	500,00
07.00016	Kit side extensions 2400x1500x360 mm	520,00
07.00027	Kit side extensions 2500x1600x360 mm	560,00



RN 10

RN 15-25-30



RN 10-15-25-30



HEAVY-DUTY RANGE of WHEEL TRAILER for Tractors and All Terrain vehicles



RP T

TECHNICAL SPECIFICATIONS

FRAME	High quality fabricated steel chassis
BODY	Steel sheet 30/10 mm tickness, 2 winches and 8 hooks
SIDES	All hinged and removable cpl with brackets for side extensions Removable posts, Rear side hinged at the top
TOW-HOOK	Adjustable in 6 positions
TIPPING	3-WAY HYDRAULIC TIPPING with quick attach coupler
BRAKING	With mechanical lever
LIGHTING	EEC Standard system – 7 pin plug
WHEEL JACK	Adjustable in height
ACCESSORIES	Parabolic leaf springs, extra-side extensions



CODE	DESCRIPTION	EURO
50/0409	Trailer model RP/16 T , load capacity Kg 1.600 , wheels 205/75-15 (or equivalent), galvanised sides Body 2400x1500x360 mm	4.260,00
50/0410	Trailer model RP/20 T , load capacity Kg 2.000 , wheels 235/75-15 (or equivalent), galvanised sides Body 2400x1500x360 mm	4.340,00
50/0411	Body 2600x1500x360 mm	4.440,00
50/0412	Trailer model RP/25 T , load capacity Kg 2.500 , wheels 235/75-15 (or equivalent), galvanised sides Body 2400x1500x360 mm	4.390,00
50/0413	Body 2600x1500x360 mm	4.490,00
50/0414	Body 2700x1600x360* mm – Parabolic leaf-springs	5.400,00
50/0424	Trailer model RP/30 T , load capacity Kg 3.000 , wheels 10.0/75-15.3 Implement Painted sides Body 2700x1600x360* mm	5.100,00
50/0415	Body 2700x1600x360* mm – Parabolic leaf-springs	5.550,00
Options and accessories:		
FW	Front Winches (2)	140,00
TSE2400	Side extensions 2400x1500x300 mm (painted)	230,00
TSE2600	Side extensions 2600x1500x300 mm (painted)	260,00
07.00046	Kit side extensions 2400x1500x360 mm (galvanised)	700,00
07.00032	Kit side extensions 2600x1500x360 mm (galvanised)	740,00
07.00040	Kit side extensions 2400x1500x300 mm (painted)	920,00
07.00047	Kit side extensions 2600x1500x300 mm (painted)	990,00
07.00048	Kit side extensions 2700x1600x360 mm (painted)	1.070,00

* Galvanised sides not available

For other accessories, please contact our Tech Dept.

ERREPPi S.R.L.
Via dell'Industria, 2 - 06031 BEVAGNA
Tel. 0742.360592 - Fax 0742.360810
www.erreppi.com - e-mail: info@erreppi.com

Export Price list n. 05 dt 01.01.2014



Vehicles at Work